
Automotive Film





PROFESSIONALLY INSTALLED



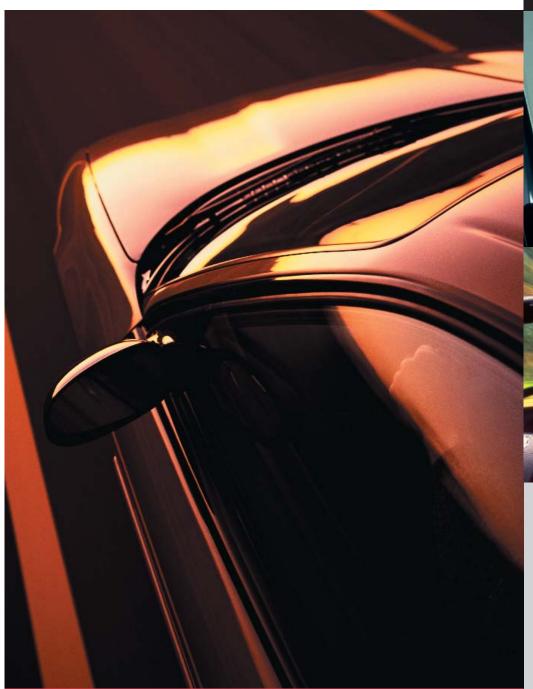

Typical solar properties with film mounted to 3mm clear glass. All values averaged from routinely accumulated quality control data.

Please consult the LLumar Technical Website for the most recent product testing and performance data.

99

99

SA35CSRPS8 (8 mil charcoal)

SA50CSRPS8 (8 mil charcoal)

38

52

34

29

6

6

32,000

32.000

235

235

>100

>100

29,505

29,505

>2720

>2720

156

156